






Tough, dependable label printers designed to withstand the rigours of field job sites

M210 Label Printer/M211 Label Printer

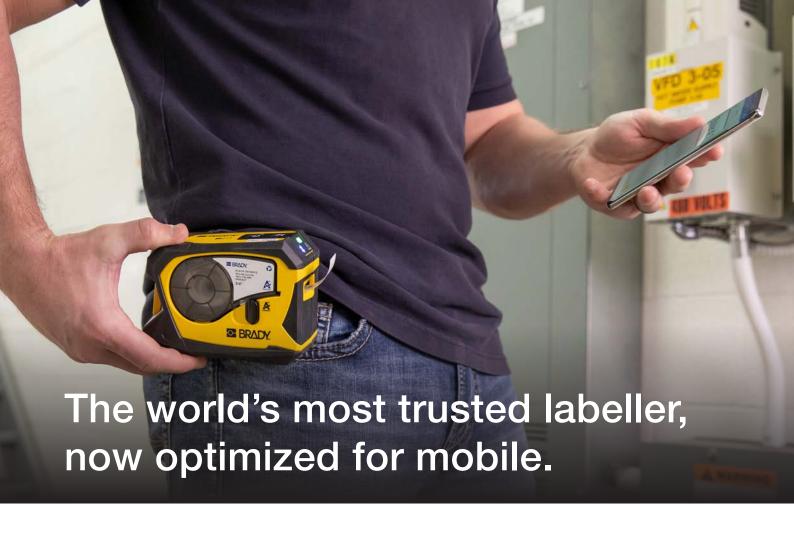

Top applications



Wire and cable

Sleeves, self-lam, wire wraps, flag labels, cable markers



DataCom

Self-lam, flag labels, patch-panel, face plate labeling



Electrical

Sleeves, self-lam, wire wraps, cable markers, flag and raised panel



Lean / 5S

Rack, gauge, part bin labeling



General identification

Directional marking, equipment labeling

Unique features

- Prints labels with the Express Labels Mobile App, for iOS and Android
- Withstands 1.8 m drops, is crush-resistant to 115 kg and has militarygrade shock and vibration resistance per MIL-STD-810G Method 5.16.6 SA4.6.5
- Advanced battery technology for all-day use; prints 300 labels on a full charge
- 11 label design guides, 22 barcode symbologies, 85 fonts, 31 languages and over 1,400 symbols
- Imports data from spreadsheets and allows label saving and label sharing
- 90+ cartridges, made from 12 unique materials, with continuous and pre-sized label widths between 6.4 mm to 19.1 mm

Label output

Speed: Prints up to 100 labels / day at 15.2 mm per second

Quality: 203 dpi print resolution

Optional accessories

- Attachable magnet for hands-free label creation
- Hard and soft carrying cases to protect your label printer and keep accessories organized
- Belt clip provides hands-free transport
- Power brick charges label printer, phone or tablet

Available kits

Printer with accessory kit



Popular self-laminating vinyl, shrink sleeves, wire wraps, pre-sized labels, BradyGrip print-on hook material and indoor/outdoor vinyl are offered in enclosed cartridges



Belt clip provides hands-free transport

Tough, industrial labeler designed to survive and thrive on any worksite.





Get more done all day long with 300 label prints from one full battery charge

Fast and dependable Bluetooth connection




Label creation, just a tap away.

Go mobile and get more options with Express Labels. www.brady.eu/software/express-labels-mobile





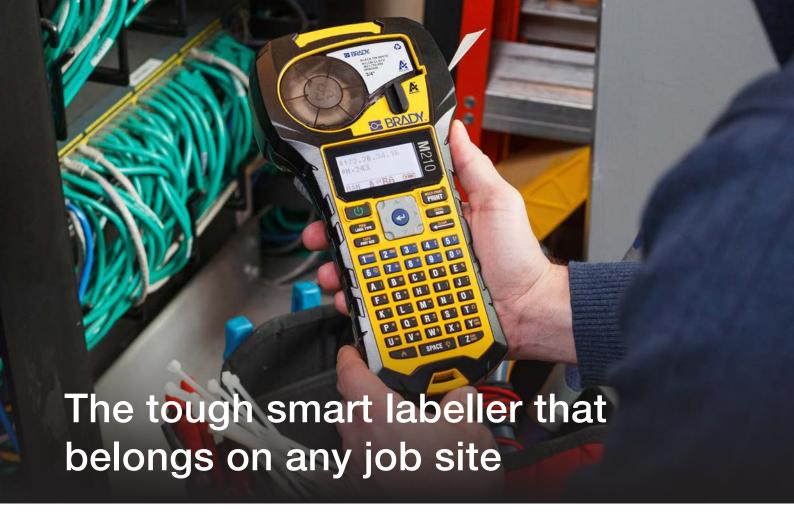

Top applications



Wire and cable

Sleeves, self-lam, wire wraps, flag labels, cable markers



DataCom

Self-lam, flag labels, patch-panel, face plate labeling



Electrical

Sleeves, self-lam, wire wraps, cable markers, flag and raised panel



Lean / 5S

Rack, gauge, part bin labeling



General identification

Directional marking, equipment labeling

Unique features:

- Auto-format labels with 11 pre-loaded application design guides for rapid and accurate label creation
- Military-grade shock and vibration resistance per MIL-STD-810G Method 5.16.6 SA4.6.5 — drop tested to withstand the roughest job sites
- Easy-to-access hot key and menus for fast label creation, on-board symbols and the ability to store 12 label files up to 2MB
- · Ability to create UPC, DataMatrix and QR Codes
- Onboard label material gauge that tracks the amount of material left in the cartridge
- 90+ compatible easy-to-load cartridges with continuous and pre-sized label widths between 6.4 mm to 19.1mm

Label output

Speed: Prints up to 100 labels / day at 10.2 mm per second

Quality: 203 dpi print resolution

Optional accessories

- Multi-functional tool that includes a heavy-duty magnet, retractable stand and flashlight
- Attachable magnet for handsfree label creation
- Rechargeable Li-lon battery pack
- Hard and soft carrying cases to protect your label printer and keep accessories organized

Available kits

Printer with accessory kit





How do pre-sized labels change the game?

- Print on the full label and minimize wasted label space
- Rounded corners compared to cutting continuous
- Consistent sizing from one label to the next












| | Wire & Cable | Electrical & Datacom | Laboratory | General ID | Pre-sized Labels Available |
|--|--------------|-------------------------|------------|------------|-------------------------------|
| B-342 PermaSleeve® Heat-shrink sleeves, provide a wire marking solution that combines speed, ease of use, and permanence to create long-lasting, high quality identification. | * | * | | | |
| B-403 The water dissolvable paper label is self-adhesive and extremely easy to apply. Exposing the label to warm water will completely dissolve it within 30 seconds, without damage to the surface it was applied to, and without leaving any residue. It reduces the labour required to remove labels, reduces maintenance to filters and drains and enables easy re-identification of reusable items in a range of industries. | | | * | * | |
| B-414 Get a grip on your wire and cable identification — Brady and VELCRO® Brand have partnered to bring you BradyGrip™ Print-on Hook Material, an exclusive print-and-place material that can be easily applied, repositioned or removed. | | * | | * | |
| B-423 White glossy polyester with permanent adhesive. Can be used for component identification, bar code labeling, rating plates and solar panel identification. | | * | | * | 1 |
| B-427 Brady's self-laminating label includes a non-adhesive printable zone and a translucent, self-adhesive laminate that is wrapped around a cable. | * | * | * | | 1 |
| B-430 Clear glossy polyester with permanent adhesive. Can be used for rating and serial plates using alphanumerics, barcodes, graphic symbols and logos that require name plate quality. | | * | * | * | |
| B-461 Printable high-performance laboratory self-laminating polyester. Ultra-thin construction prevents jamming in racks & centrifuge. Suitable for liquid nitrogen application if material is wrapped around itself. | | | * | * | |
| B-488 Solvent-resistant, white matte polyester with permanent adhesive. | | * | * | * | |
| B-499 Continuous, narrow nylon cloth strips for alignment on terminal blocks. The printer's terminal block mode allows for user-specified spacing. | * | * | * | * | 1 |
| B-581 Repositionable Vinyl Film (B-581) is a durable, flexible, high-gloss material ideal for indoor/outdoor marking where frequent repositioning is required. | | | | * | |
| B-595 B-595 vinyl will adhere to difficult low surface energy items, including: PVC piping, blow-molded equipment cases, ABS plastics, powder-coated surfaces and equipment made from recycled plastics. The B-595 material also excels at sticking to highly textured surfaces such as painted cinder block walls, finished uneven wood, textured plastics, rough-pipes and paper-jacketed pipes. | | * | * | * | |
| B-7425 B-7425 polypropylene - economical white material with chemical and high-temperature resistance. | | | * | * | |
| | | | | | |

Voice & datacom identification














Electrical identification





Facility & safety identification








M210/M211 Label Printer Materials



Self-laminating vinyl wire and cable labels (B-427)

Labels feature a clear, non-printable area that wraps around the print-on area to protect text. Vinyl material offers superior resistance to solvents, oil, grease, dirt and water.




Temp. range: -40° C to 70° C. UL recognised.

| Dia | ıgram | Order Reference | Colour | Label Width A (mm) | Label Length B (m) | Label Height B (mm) | Printable Area Width PW (mm) | Printable Area Height PH (mm) | Labels per Roll | Max. Wire Diameter (mm) |
|------|----------|--------------------|-----------------------------|-----------------------|-----------------------|------------------------|---------------------------------|----------------------------------|--------------------|----------------------------|
| B-42 | 27: Self | f-laminating Vinyl | | | | | | | | |
| | D | M21-11-427 | Black on White | 12.70 | - | 19.05 | 12.70 | 9.53 | 150 | 5.05 |
| | D | M21-18-427 | Black on White | 25.40 | _ | 19.05 | 25.40 | 9.53 | 121 | 5.05 |
| | A | M21-750-427 | Black on White, Transparent | 19.05 | 4.30 | - | 9.53 | - | 1 | 3.00 |
| | A | M21-1000-427 | Black on White, Transparent | 25.40 | 4.30 | _ | 9.53 | _ | 1 | 5.10 |
| | A | M21-1250-427 | Black on White, Transparent | 31.75 | 4.30 | - | 12.70 | - | 1 | 5.70 |
| | A | M21-1500-427 | Black on White, Transparent | 38.10 | 4.30 | - | 12.70 | - | 1 | 8.10 |



Nylon cloth wire and cable labels (B-499)

The labels wrap around wires and are highly pliable, conforming to tightly curved surfaces. When in wire marker mode, text auto-repeats on the label. Labels can also be used for flagging with the flag mode. Pre-sized labels will allow for Consistent sizing from one label to the next.




| | ⊙ <u>⊢</u> B — — |
|----------|-------------------------|
| T | <u> </u> |
|) | 1 |
| <u>.</u> | |
| | |
| | |

| Diagram | Order Reference | Colour | Label Width A (mm) | Label Length B (m) | Label Height B (mm) | Labels per Roll |
|-----------------|-----------------|----------------|--------------------|--------------------|---------------------|-----------------|
| B-499: Nylon Cl | oth | | | | | |
| • | M21-375-499 | Black on White | 9.53 | 4.88 | - | 1 |
| • | M21-500-499 | Black on White | 12.70 | 4.88 | - | 1 |
| • | M21-750-499 | Black on White | 19.05 | 4.88 | - | 1 |
| A | M21-11-499 | Black on White | 19.05 | - | 12.70 | 140 |
| A | M21-131-499 | Black on White | 25.40 | - | 12.70 | 121 |
| | M21-18-499 | Black on White | 25.40 | - | 19.05 | 121 |
| A | M21-136-499 | Black on White | 38.10 | - | 19.05 | 91 |
| | M21-137-499 | Black on White | 50.80 | - | 19.05 | 73 |



BradyGrip Print-on Hook Material (B-414)

BradyGrip Print-on Hook Material is a one-of-a-kind solution that allows identification to be easily printed and placed on bundles. A grippy backing makes it easy to reposition or remove, so no need for costly rework. Just print on and place – it's that simple.



| Diagram | Order Reference | Colour | Label Width A (mm) | Label Length B (m) | Recommended Velcro® One-Wrap® size range to use with BradyGrip™ (mm) | Labels per Roll |
|------------------|-----------------|----------------|--------------------|--------------------|--|-----------------|
| B-414: Polyester | | | | | | |
| O | M21-250-414 | Black on White | 6.35 | 3.048 m | 10 - 13 | 1 |
| • | M21-500-414 | Black on White | 12.70 | 3.048 m | 13 - 16 | 1 |
| • | M21-750-414 | Black on White | 19.05 | 3.048 m | 20 - 50 | 1 |

PermaSleeve PS Heat-shrink Wire Markers (B-342)

Military/industrial grade sleeves offer the ultimate in marker durability, permanence and aesthetic appearance. 3:1 heat-shrinkable markers fit snugly around wires, are fade-resistant and flame-retardant. Temp range: -55° C to 135° C. RoHS compliant and UL recognised.

 Meets specifications:
 Tested per:

 SSAE-AS-23053/5
 ASTM E162

 SAE-AS-81531
 ASTM E662

 MIL-STD-202






| Diagram | Order Reference | Colour | Label Width A (mm) | Label Length B (m) | Labels per Roll | Min. Wire Diameter (mm) | Max. Wire Diameter (mm) |
|------------|---------------------|-----------------|--------------------|--------------------|-----------------|-------------------------|-------------------------|
| B-342: Hea | t-shrink Polyolefin | | | | | | |
| • | M21-125-C-342 | Black on White | 5.97 | 2.13 | 1 | 1.17 | 2.79 |
| • | M21-187-C-342 | Black on White | 8.51 | 2.13 | 1 | 1.57 | 3.81 |
| • | M21-250-C-342 | Black on White | 11.15 | 2.13 | 1 | 2.39 | 5.46 |
| • | M21-375-C-342 | Black on White | 16.38 | 2.13 | 1 | 3.18 | 8.13 |
| • | M21-125-C-342-YL | Black on Yellow | 5.97 | 2.13 | 1 | 1.17 | 2.79 |
| • | M21-187-C-342-YL | Black on Yellow | 8.51 | 2.13 | 1 | 1.57 | 3.81 |
| • | M21-250-C-342-YL | Black on Yellow | 11.15 | 2.13 | 1 | 2.39 | 5.46 |
| • | M21-375-C-342-YL | Black on Yellow | 16.38 | 2.13 | 1 | 3.18 | 8.13 |

Patch panel adhesive strips (B-499 and B-595)

Continuous material for port identification features user-specified spacing when using patch panel mode.

- B-499 permanent nylon cloth Durable industrial strength material designed to conform to curved or flat surfaces.
- B-595 permanent vinyl Very pliable, suitable for rough surfaces and outdoor use. Offers excellent resistance to oils, detergents, dirt, grime and many solvents.






| Diagram | Order Reference | Colour | Label Width A (mm) | Label Length B (m) | Labels per Roll | |
|--------------|-----------------|----------------|--------------------|--------------------|-----------------|--|
| B-499: Nylon | Cloth | | | | | |
| • | M21-375-499 | Black on White | 9.53 | 4.88 | 1 | |
| • | M21-500-499 | Black on White | 12.70 | 4.88 | 1 | |
| B-595: Vinyl | | | | | | |
| • | M21-375-595-WT | Black on White | 9.53 | 6.40 | 1 | |
| • | M21-500-595-WT | Black on White | 12.70 | 6.40 | 1 | |

Terminal block adhesive strips (B-499)

Continuous, narrow nylon cloth strips for alignment on terminal blocks. The printer's terminal block mode allows for user-specified spacing.






| Diagram | Order Reference | Colour | Label Width A (mm) | Label Length B (m) | Labels per Roll |
|-----------------|-----------------|----------------|--------------------|--------------------|-----------------|
| B-499: Nylon Cl | oth | | | | |
| • | M21-375-499-TB | Black on White | 9.53 | 4.88 | 1 |
| • | M21-500-499-TB | Black on White | 12.70 | 4.88 | 1 |

M210/M211 Label Printer Materials



Polyester labels for inside panel markings and general identification (B-423, B-430 and B-488)

- B-423: white glossy polyester with permanent adhesive.
- B-430: clear glossy polyester with permanent adhesive.
- B-488: solvent-resistant, white matte polyester with permanent adhesive.




| Diagram | Order Reference | Colour | Label Width A (mm) | Label Length B (m) | Label Height B (mm) | Labels per Roll |
|-----------------|-------------------|----------------------|--------------------|--------------------|---------------------|-----------------|
| 3-423: Polyeste | r | | | | | |
| • | M21-250-423 | Black on White | 6.35 | 6.40 | - | 1 |
| • | M21-375-423 | Black on White | 9.53 | 6.40 | _ | 1 |
| • | M21-500-423 | Black on White | 12.70 | 6.40 | - | 1 |
| • | M21-750-423 | Black on White | 19.05 | 6.40 | - | 1 |
| A | M21-7-423 | Black on White | 19.05 | - | 12.70 | 1 |
| A | M21-17-423 | Black on White | 25.40 | - | 12.70 | 1 |
| A | M21-18-423 | Black on White | 25.40 | - | 19.05 | 1 |
| A | M21-30-423 | Black on White | 38.10 | - | 19.05 | 1 |
| A | M21-137-423 | Black on White | 50.80 | - | 19.05 | 1 |
| -430: Polyeste | | | | | | |
| • | M21-250-430 | Black on Transparent | 6.35 | 6.40 | _ | 1 |
| • | M21-375-430 | Black on Transparent | 9.53 | 6.40 | | 1 |
| • | M21-500-430 | Black on Transparent | 12.70 | 6.40 | - | 1 |
| • | M21-750-430 | Black on Transparent | 19.05 | 6.40 | _ | 1 |
| • | M21-250-430-WT-CL | White on Transparent | 6.35 | 6.40 | - | 1 |
| • | M21-375-430-WT-CL | White on Transparent | 9.53 | 6.40 | - | 1 |
| • | M21-500-430-WT-CL | White on Transparent | 12.70 | 6.40 | _ | 1 |
| • | M21-750-430-WT-CL | White on Transparent | 19.05 | 6.40 | _ | 1 |
| -488: Polyeste | r | | | | | |
| • | M21-375-488 | Black on White | 9.53 | 6.40 | _ | 1 |
| • | M21-500-488 | Black on White | 12.70 | 6.40 | - | 1 |
| • | M21-750-488 | Black on White | 19.05 | 6.40 | _ | 1 |



Repositionable vinyl (B-581)

Best choice for indoor marking where frequent repositioning is required, such as shelves. Special adhesive allows easy removal of label to re-apply again and again.




| Diagram | Order Reference | Colour | Label Width A (mm) | Roll length (m) | Labels per Roll |
|--------------|-----------------|----------------|--------------------|-----------------|-----------------|
| B-581: Vinyl | | | | | |
| O | M21-500-581-WT | Black on White | 12.70 | 6.40 | 1 |
| O | M21-750-581-WT | Black on White | 19.05 | 6.40 | 1 |

M210/M211 Label Printer Materials

Indoor and outdoor vinyl labels for safety, facility and lean / 5S (B-595)

Continuous vinyl material ideal for lean/5S labels, pipe markers, equipment and production area identification. These labels offer excellent resistance to oils, detergents, dirt, grime and many solvents. Permanent adhesive, very pliable, suitable for rough surfaces and outdoor use.

- 8-10 years average outdoor durability*
- Temp. range: -40° C to 82° C.





| Diagram | Order Reference | Colour | Label Width A (mm) | Label Length B (m) | Labels per Roll |
|--------------|-----------------|-----------------|--------------------|--------------------|-----------------|
| B-595: Vinyl | | | | | |
| • | M21-375-595-GY | Black on Grey | 9.53 | 6.40 | 1 |
| • | M21-500-595-GY | Black on Grey | 12.70 | 6.40 | 1 |
| • | M21-750-595-GY | Black on Grey | 19.05 | 6.40 | 1 |
| • | M21-375-595-0R | Black on Orange | 9.53 | 6.40 | 1 |
| • | M21-500-595-0R | Black on Orange | 12.70 | 6.40 | 1 |
| • | M21-750-595-0R | Black on Orange | 19.05 | 6.40 | 1 |
| • | M21-250-595-WT | Black on White | 6.35 | 6.40 | 1 |
| • | M21-375-595-WT | Black on White | 9.53 | 6.40 | 1 |
| • | M21-500-595-WT | Black on White | 12.70 | 6.40 | 1 |
| • | M21-750-595-WT | Black on White | 19.05 | 6.40 | 1 |
| • | M21-250-595-YL | Black on Yellow | 6.35 | 6.40 | 1 |
| • | M21-375-595-YL | Black on Yellow | 9.53 | 6.40 | 1 |
| • | M21-500-595-YL | Black on Yellow | 12.70 | 6.40 | 1 |
| • | M21-750-595-YL | Black on Yellow | 19.05 | 6.40 | 1 |
| • | M21-375-595-BK | White on Black | 9.53 | 6.40 | 1 |
| • | M21-500-595-BK | White on Black | 12.70 | 6.40 | 1 |
| • | M21-750-595-BK | White on Black | 19.05 | 6.40 | 1 |
| • | M21-375-595-BL | White on Blue | 9.53 | 6.40 | 1 |
| • | M21-500-595-BL | White on Blue | 12.70 | 6.40 | 1 |
| • | M21-750-595-BL | White on Blue | 19.05 | 6.40 | 1 |
| • | M21-375-595-BR | White on Brown | 9.53 | 6.40 | 1 |
| • | M21-500-595-BR | White on Brown | 12.70 | 6.40 | 1 |
| • | M21-750-595-BR | White on Brown | 19.05 | 6.40 | 1 |
| • | M21-375-595-GN | White on Green | 9.53 | 6.40 | 1 |
| • | M21-500-595-GN | White on Green | 12.70 | 6.40 | 1 |
| • | M21-750-595-GN | White on Green | 19.05 | 6.40 | 1 |
| • | M21-375-595-PL | White on Purple | 9.53 | 6.40 | 1 |
| • | M21-500-595-PL | White on Purple | 12.70 | 6.40 | 1 |
| • | M21-750-595-PL | White on Purple | 19.05 | 6.40 | 1 |
| • | M21-375-595-RD | White on Red | 9.53 | 6.40 | 1 |
| • | M21-500-595-RD | White on Red | 12.70 | 6.40 | 1 |
| • | M21-750-595-RD | White on Red | 19.05 | 6.40 | 1 |

^{*} Average expected outdoor life of product will depend on user definition of failure, climatic conditions, mounting techniques and material colour. The 8 to 10 year outdoor durability applies to the vinyl label stock only; ribbon durability will vary.

M211 Label Printer

| Article No. | Description |
|-------------|---------------------|
| 170381 | M211 Printer - EMEA |

This printer ships in a carton pack with M21-750-499 label cartridge, AC power cord with EU, UK and US plugs and Quick Start Guide.

M211 Label Printer Kits

| Article No. | Description |
|-------------|---------------|
| 170390 | M211 EMEA kit |

This kit ships in a hard case with a M211 Printer, M21-750-499 Label Cartridge, Quick Start Guide, AC Power cord with EU, UK and US plugs, Belt Clip and Power Pack.



M211 Accessories

| Article No. | Description |
|-------------|----------------------------|
| 170385 | M211 Belt Clip |
| 170386 | M211 Hard Case |
| 170387 | M211 Power Brick |
| 170388 | M211 AC Wall adapter EMEA |
| 170425 | M211 Magnet Only Accessory |



Printer specifications

| Specifications | |
|---|---|
| Print Technology | Thermal Transfer |
| Print Resolution (dpi) | 203 |
| Print Speed (mm/sec) | 15.24 |
| Colour Capability | Monocolour |
| Continuous vs Die-cut Labels | Continuous and Die-cut |
| Max. Label Width (mm) | 19.05 |
| Max. Print Length (mm) | 914.40 |
| Recommended Usage per Day | 100 |
| Stand-alone Printing (Detached from PC) | Peripheral |
| Connectivity Options | Bluetooth® 5 Low Energy (class II) |
| Software Compatibility | Express Labels mobile app* |
| Phones & Tablets Supported | Android devices with Android OS 5+ iPhone 5S or newer with iOS 10+ |
| Bar Code Type | Over 20 barcode types available, including QR and Datamatrix, using Express Labels app. |
| Built-in Symbols | Over 1400 symbols across 18 categories available in the Express Labels app. |
| Physical Properties | |
| Width x Height x Depth (mm) | 137.16 x 101.60 x 66.04 |
| Weight (kg) | 0.54 |
| On Screen Indicators | LED light symbols show connection status, battery gauge and error messaging. |
| Cutter | Auto Cutter With label retention |
| Warranty | 2 years |
| Drop Test | Resistant to 1.8 metre drops Resistant to 115 kg crushes Resistant to military-grade shocks (MIL-STD-810G |



^{*} Download the Express Labels mobile app: www.brady.eu/software/express-labels-mobile



M210 Label Printer

| Article No. | Description |
|-------------|---|
| 152260 | M210 Label Printer - Carton pack |
| 152262 | M210 Label Printer - Carton Pack - Russ |

This printer ships in a carton pack with a Quick Start Guide and an M21-750-499 label cartridge.

M210 Starter Kits

| Article No. | Description | |
|-------------|-----------------------|--|
| 311307 | M210 Printer kit EU | |
| 311310 | M210 Printer kit RUSS | |
| 311308 | M210 Printer kit UK | |
| 311309 | M210 Printer kit US | |

This kit comes in a hard case holding a M210 Printer, a Li-ion Battery, a Power Cord and a M21-750-499 Label Cartridge

M210 Application Kits

| Article No. | Description |
|-------------|---------------------------|
| 311311 | M210 Electrical Kit EU |
| 311317 | M210 Electrical Kit Russ |
| 311312 | M210 Electrical Kit UK |
| 311313 | M210 Electrical Kit US |
| 311314 | M210 TeleDatacom Kit EU |
| 311318 | M210 TeleDatacom Kit Russ |
| 311315 | M210 TeleDatacom Kit UK |
| 311316 | M210 TeleDatacom Kit US |

Electrical Kit: This kit comes in a hard case holding a M210 Printer, a Li-ion Battery, a Power Cord, M21-1000-427, M21-750-595-YL and a M21-750-499 Label Cartridge.

TeleDatacom Kit: This kit comes in a hard case holding a M210 Printer, a Li-ion Battery, a Power Cord, M21-1250-427, M21-250-423 and a M21-750-499 Label Cartridge.



Accessories

| Article No. | Description |
|-------------|---|
| 110416 | AC Adaptor, Europe 220V - M210 |
| 110417 | AC Adaptor, UK 240V - M210 |
| 110937 | AC Adaptor, US 110V - M210 |
| 150617 | Protective softbag for portable printers - M210 |
| 170385 | Belt Clip - M210 |
| 170420 | Lithium-ion Battery Pack - M210 |
| 170421 | Hard Case - M210 |
| 170424 | Multifunctional Accessory - M210* |
| 170425 | Magnet Only Accessory - M210 |

^{*} Multifunctional accessory consists of Magnet, Flashlight, Stand, Belt loop and Pole strap. 2 AAA batteries required (not included).



Printer specifications

| Specifications | |
|---|--|
| Print Technology | Thermal Transfer |
| Print Resolution (dpi) | 203 |
| Print Speed (mm/sec) | 10.00 |
| Colour Capability | Monocolour |
| Continuous vs Die-cut Labels | Continuous and Die-cut |
| Max. Label Width (mm) | 19.05 |
| Max. Print Length (mm) | 914.40 |
| Recommended Usage per Day | 100 |
| Stand-alone Printing (Detached from PC) | Stand-alone |
| Connectivity Options | None |
| PC Connectivity | No |
| Bar Code Type | Code 128, Code 39, Data Matrix, QR code |
| Symbol Categories | Arrows, Datacom, Electrical, Greek, Home Electrical, International, Miscellaneous, Warning |
| Physical Properties | |
| Width x Height x Depth (mm) | 114.30 x 241.30 x 63.50 |
| Weight (kg) | 0.75 |
| Keyboard Type | ABC, Cyrillic |
| Display | Monocolour LCD Screen |
| Cutter | Single Hand Manual Actuate Straight Cut With label retention |
| Warranty | 2 years |



Africa

Randburg, South Africa Tel.: +27 11 704 3295 Email: africa@bradycorp.com

Benelux

Zele, Belgium

Tel.: +32 (0) 52 45 78 11 Email: benelux@bradycorp.com

Central & Eastern Europe

Bratislava, Slovakia Tel.: +421 2 3300 4800

Email: central_europe@bradycorp.com

Denmark

Odense

Tel.: +45 66 14 44 00

Email: denmark@bradycorp.com

France

Roncq

Tel.: +33 (0) 3 20 76 94 48 Email: france@bradycorp.com

Germany, Austria & Switzerland

Egelsbach, Germany Tel.: +49 (0) 6103 7598 660 Email: germany@bradycorp.com

Hungary

Budaörs

Tel.: +36 23 500 275

Email: central_europe@bradycorp.com

Italv

Gorgonzola

Tel.: +39 02 26 00 00 22 Email: italy@bradycorp.com

Middle East FZE

Dubai, UAE Tel.: +971 4881 2524

Email: me@bradycorp.com

Norway

Kjeller

Tel.: +47 70 13 40 00

Email: norway@bradycorp.com

Spain & Portugal

Madrid, Spain

Tel.: +34 900 902 993

Email: spain@bradycorp.com, portugal@bradycorp.com

Sweden, Finland, Baltic states

Kista, Sweden

Tel.: +46 (0) 8 590 057 30

Email: sweden@bradyeurope.com

Turkey

Istanbul

Tel.: +90 212 264 02 20 / 264 02 21 Email: turkey@bradycorp.com

UK & Ireland

Banbury, UK

Tel.: +44 (0) 1295 228 288 Email: uk@bradycorp.com

Our mission is to identify and protect people, products and premises



To help minimise our impact on the environment, Brady limits its number of reprints.

Updated versions are always available for download on www.bradyeurope.com.



Search for: EUR-M-244-EN

Your Distributor

GSH Identification Solutions B.V. Lelystraat 93 K 3364 AH Sliedrecht Tel. +31 184 421 859 www.gsh-id.nl info@gsh-id.nl www.bradywebshop.nl

